

NDCopper Flake: C1-6000F

Technical Data Sheet

NanoDynamics™
DATA/INFO

Description:
High Coverage
Uniform Size
Oxidation Resistant


Applications:
EMF Shielding
BME-MLCC Terminations
Conductor Pastes for Dipping

Typical Attributes:


Total Oxygen: 0.5 wt%
Total Carbon: 0.3 wt%
Tap Density: 1.5 g/cc

Particle Size: D10: 3 μm
(by Microtrac) D50: 6 μm
D90: 12 μm

Micrograph

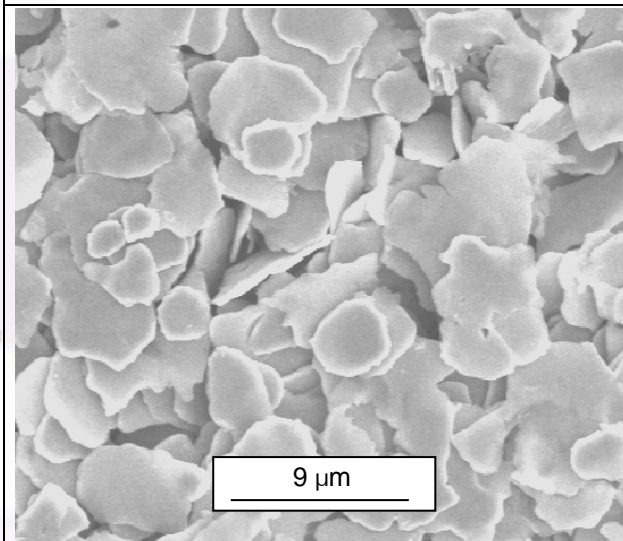

Typical Particle Size Distribution

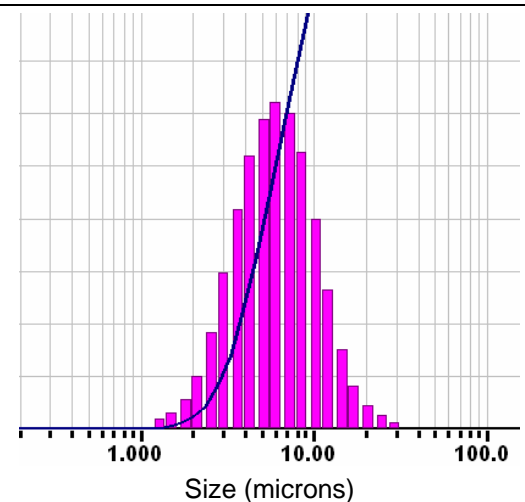

The values reported on this data sheet are to be considered typical and do not imply essential representation of the product specification. The information contained herein is believed to be accurate and reliable but is presented WITHOUT GUARANTEE OR IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS on the part of NANODYNAMICS, INC. Further, nothing presented herein should be interpreted as an authorization or inducement to infringe any relevant patent. UNDER NO CIRCUMSTANCES SHALL NANODYNAMICS, INC. BE LIABLE FOR DIRECT, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES REGARDLESS OF LEGAL THEORY, ARISING OUT OF THE USE OR HANDLING OF THE PRODUCT OR PRODUCTS REFERRED TO HEREIN. The sole remedy of the buyer for any claims shall be limited to the buyer's purchase price. TECHNICAL ADVICE IS ACCEPTED AT THE BUYERS RISK AND IS NOT A WARRANTY